

SINGLE-SUPPLY QUAD OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION


The NJM3403A is high performance ground sensing quad operational amplifier featuring the high slew rate and no crossover distortion.

The NJM3403A is improved version of the NJM2902.


■ FEATURES

- Single Supply
- Operating Voltage (+4V~+36V)
- Low Operating Current (3mA typ.)
- Slew Rate (1.2V/μs typ.)
- Package Outline DIP14,DMP14,SSOP14
- Bipolar Technology


■ PACKAGE OUTLINE



NJM3403AD




NJM3403AM




NJM3403AV

■ PIN CONFIGURATION

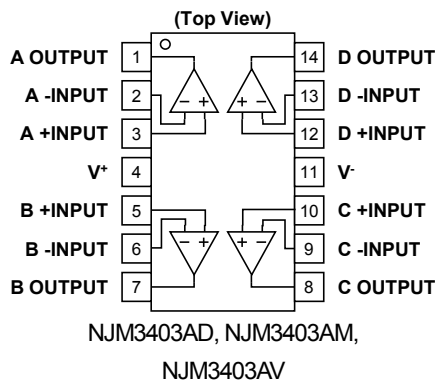

■ EQUIVALENT CIRCUIT (1/4 Shown)

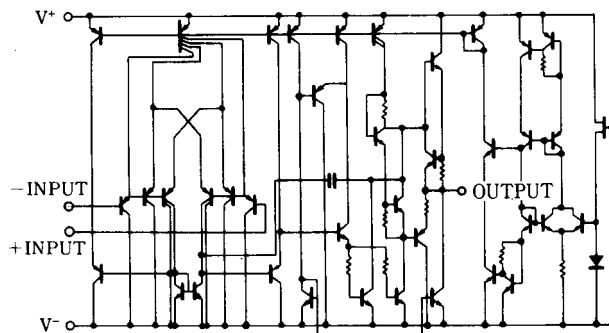

NJM3403A

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|--------------|--|------|
| Supply Voltage | $V^+(V^-/V)$ | 36 (or ± 18) | V |
| Differential Input Voltage | V_{ID} | 36 | V |
| Input Voltage | V_{IC} | -0.3~+36 | V |
| Power Dissipation | P_D | (DIP14) 500 (DMP14) 300 (SSOP14) 300 | mW |
| Operating Temperature Range | T_{opr} | -40~+85 | °C |
| Storage Temperature Range | T_{stg} | -40~+125 | °C |

■ ELECTRICAL CHARACTERISTICS


(Ta=25°C, $V^+/V^- = \pm 15V$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|--------------|---------------------------------|----------|----------|------|------------|
| Input Offset Voltage | V_{IO} | $R_S=0\Omega$ | - | 2 | 5 | mV |
| Input Offset Current | I_{IO} | | - | 5 | 50 | nA |
| Input Bias Current | I_B | | - | 70 | 200 | nA |
| Large Signal Voltage Gain | A_V | $R_L > 2k\Omega$ | 88 | 100 | - | dB |
| Maximum Output Voltage Swing | V_{OM} | $R_L=2k\Omega$ | ± 13 | ± 14 | - | V |
| Input Common Mode Voltage Range | V_{ICM} | | -15~+13 | - | - | V |
| Common Mode Rejection Ratio | CMR | DC | 70 | 90 | - | dB |
| Supply Voltage Rejection Ratio | SVR | | 80 | 94 | - | dB |
| Output Source Current | I_{SOURCE} | $V_{IN}^+=1V, V_{IN}^-=0V$ | 20 | 30 | - | mA |
| Output Sink Current | I_{SINK} | $V_{IN}^+=0V, V_{IN}^-=1V$ | 10 | 20 | - | mA |
| Channel Separation | CS | $f=1k\sim 20kHz$ Input Referred | - | 120 | - | dB |
| Operating Current | I_{CC} | $R_L=\infty$ | - | 3 | 5 | mA |
| Slew Rate | SR | | - | 1.2 | - | V/ μs |
| Unity Gain Bandwidth | f_T | | - | 1.2 | - | MHz |
| Total Harmonic Distortion | THD | $f=20kHz, V_O=10V_{PP}$ | - | 1 | - | % |

■ TYPICAL CHARACTERISTICS


Open Loop Voltage Gain vs. Frequency

($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$, $T_a = 25^\circ C$)

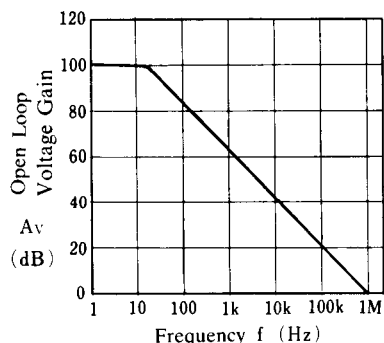


Maximum Output Voltage Swing vs. Frequency

($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$, $T_a = 25^\circ C$)

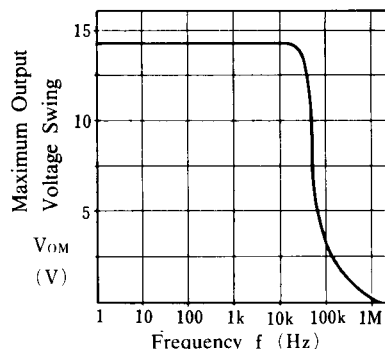


Equivalent Input Noise Voltage vs. Frequency

($V^+/V^- = 15V$, $T_a = 25^\circ C$)

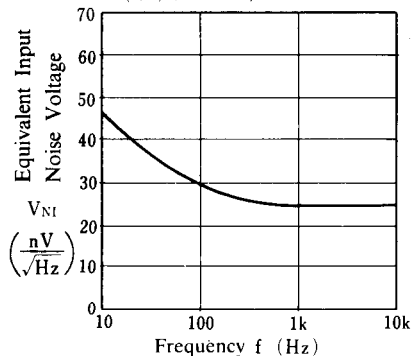


Output Source Current vs. Output Voltage Swing

($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)

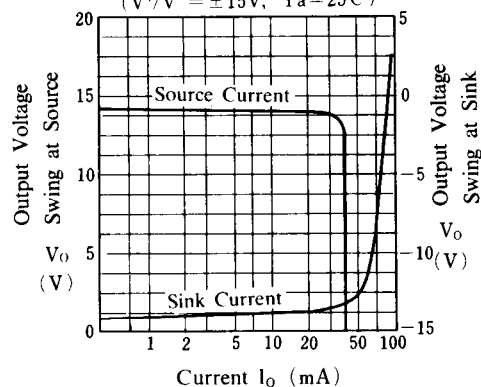


Square Wave Respons

($V^+/V^- = \pm 15V$, $R_L = 2k\Omega$, $A_v = 1$, $T_a = 25^\circ C$)




Maximum Output Voltage vs. Load Resistance

($V^+ = 5V$, $T_a = 25^\circ C$)

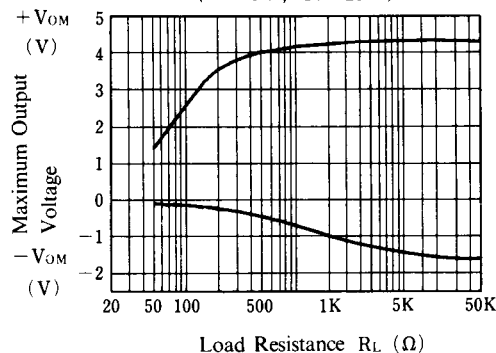


■ TYPICAL CHARACTERISTICS


Input offset Voltage vs. Temperature

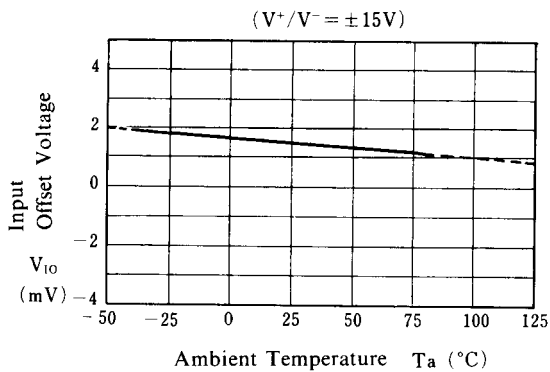


Input Bias Current vs. Temperature

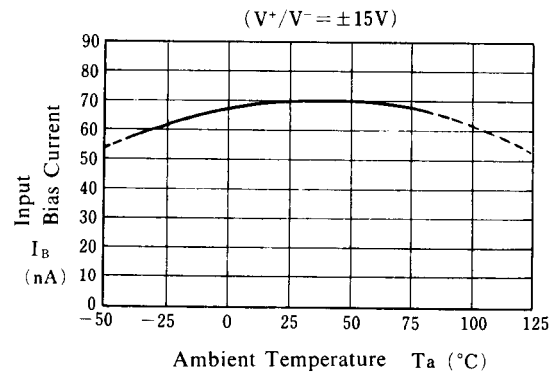


Operating Current vs. Temperature

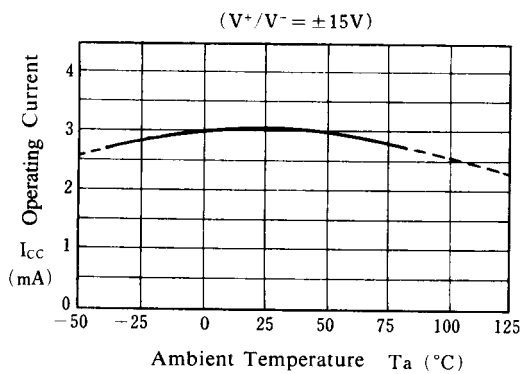


Maximum Output Voltage Swing vs. Temperature

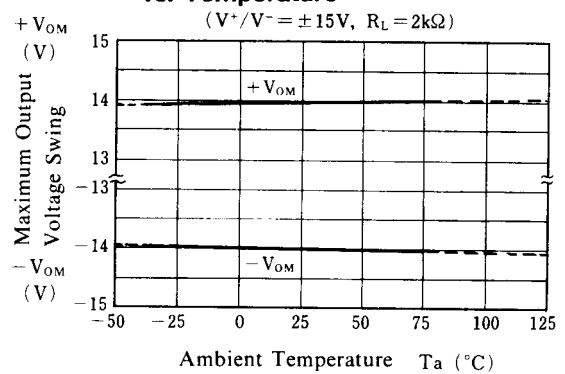

Output Source Current vs. Temperature

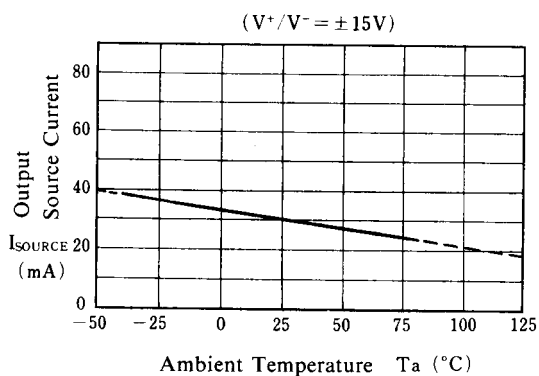


Slew Rate vs. Temperature

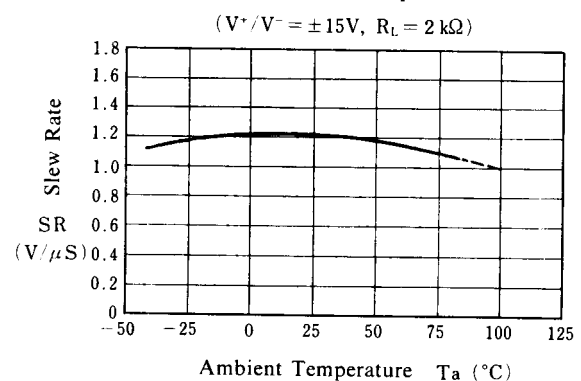


■ TYPICAL CHARACTERISTICS

Operating Current vs. Operating Voltage

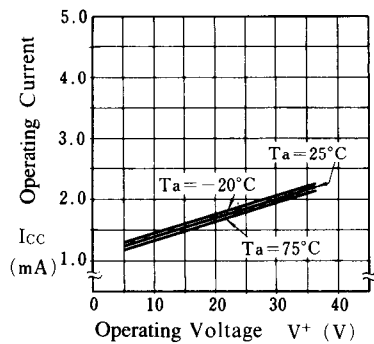


Output Voltage Swing vs. Operating Voltage

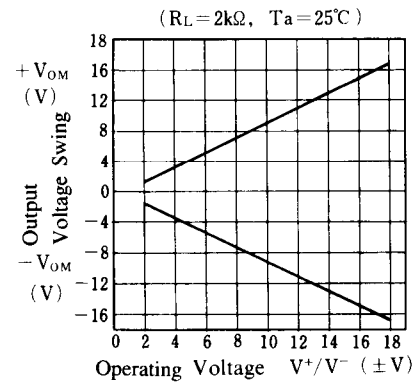


■ Crossover Distortion

Photos (1) and (2) show the output waveforms of NJM3403A and operational amplifier having crossover distortion. The NJM3403A eliminates the crossover distortion through the A,B class output stage as shown in the photo. NJM3403A IC has realized a wide band and a high slew rate in addition to the low distortion.

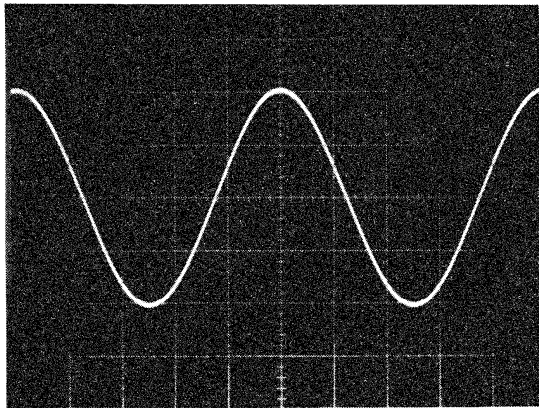

(1) NJM3403A Output Waveform

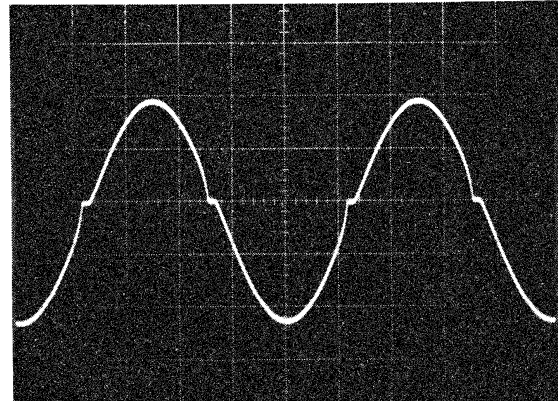

(2) Crossover Distortion Example

f = 1kHz, R_L = 2kΩ, Vertical Axis: 2V/div

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nisshinbo Micro Devices:

[NJM3403AV-TE1](#) [NJM3403AV-TE2](#) [NJM3403AM](#) [NJM3403AD](#) [NJM3403AM-TE2](#) [NJM3403AM-TE1](#)